

Cisco MPP 8800 Series

The Cisco IP Phone 8800 Series has two distinct hardware types:


- Cisco IP Phones 8811, 8841, 8851, and 8861—do not have a camera.
- Cisco IP Phones 8845 and 8865—have a built-in camera.

Features	8811	8841	8845	8851	8861	8865
Cisco IP Phone 8800 Series Major Features						
Screen	Grayscale	Color	Color	Color	Color	Color
USB Ports	0	0	0	1	2	2
Wi-Fi	No	No	No	No	Yes	Yes
Bluetooth	No	No	Yes	Yes	Yes	Yes
Cisco Intelligent Proximity	No	No	Yes	Yes	Yes	Yes
Key Expansion Modules	0	0	0	2	3	3


Figure 1. Cisco IP Phone 8845 Buttons and Hardware





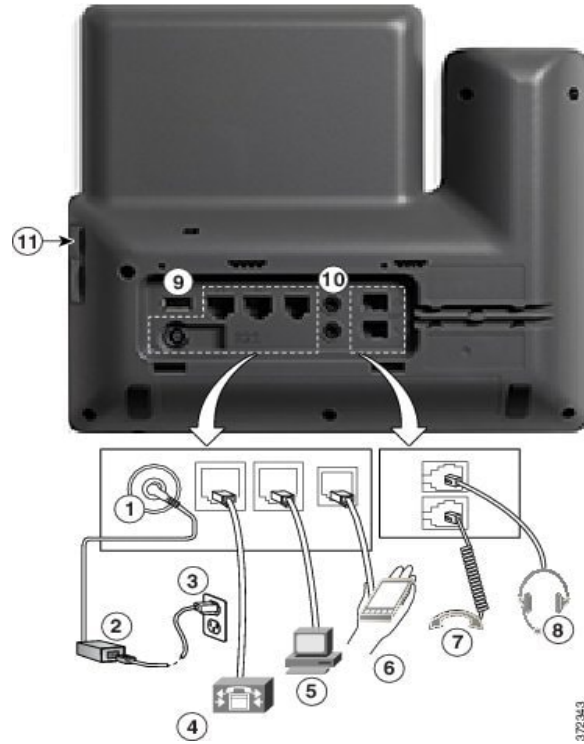











Cisco MPP 8800 Phone Connections



1	DC adaptor port (DC48V).	7	Handset connection.
2	AC-to-DC power supply (optional).	8	Analog headset connection (optional).
3	AC power wall plug (optional).	9	USB port (<i>not included in Cisco MPP 8841 and 8845</i>)
4	Network port (10/100/1000 SW) connection. IEEE 802.3at power enabled.	10	Audio In/Out ports (<i>not included in Cisco MPP 8841 and 8845</i>)
5	Access port (10/100/1000 PC) connection.	11	USB port (<i>not included in Cisco MPP 8841 and 8845</i>)
6	Auxiliary port.		

1	Handset and Handset light strip	Indicates whether you have an incoming call (flashing red) or a new voice message (steady red).
2	Camera	Use the camera for video calls.
3	Programmable feature buttons and line buttons	 Access your phone lines, features, and call sessions.

4	Softkey buttons	 Access to functions and services.
5	Back, Navigation cluster, and Release	<p>Back  Return to the previous screen or menu.</p> <p>If you press and hold the back button for more than 0.5 secs (long press), you return to the main screen or the call screen. When you are in the settings screens, the long press takes you to the main screen. If you are in one of the call screens, the long press takes you to the call screen.</p> <p>Navigation cluster  Navigation ring and Select button—Scroll through menus, highlight items and select the highlighted item.</p> <p>Release  End a connected call or session.</p>
6	Hold/Resume, Conference, and Transfer	<p>Hold/Resume  Place an active call on hold and resume the held call.</p> <p>Conference  Create a conference call.</p> <p>Transfer  Transfer a call.</p>
7	Speakerphone, Mute, and Headset	<p>Speakerphone  Toggle the speakerphone on or off. When the speakerphone is on, the button is lit.</p> <p>Mute  Toggle the microphone on or off. When the microphone is muted, the button is lit.</p> <p>Headset  Toggle the headset on or off. When the headset is on, the button is lit.</p>
8	Contacts, Applications, and Messages	<p>Contacts  Access personal and corporate directories.</p> <p>Applications  Access call history, user preferences, phone settings, and phone model information.</p> <p>Messages  Autodial your voice messaging system.</p>
9	Volume button	 Adjust the handset, headset, and speakerphone volume (off hook) and the ringer volume (on hook).